





Please read these instructions before installation.

Manufacturer's Recommendations


1. Risk of fire or electric shock: turn off power before installing.
2. Always use product within Safe Working Load.
3. Designed for statically positioned hanging. Do not use for lifting or with dynamic positioning.
4. Do not walk or stand on product.
5. Always use manufacturer supplied and specified cables. Never use uncoated cables.
6. Do not apply oil or any other lubricant to the fastener or any other part of the cable assembly.

Detailed Component List

Picture	Component	Quantity
	Light Body	1PCS
	Driver Box	1PCS
	AC Input Plug (or Daisy-Chaining Cord)	1PCS
	Dimmer Cable (optional)	1PCS

Installation

1) Take the fixture out from box.



2) Raise the hooks on both sides straight up.




3) Hang the hooks on an overhead beam. Use chains with sufficient load support for lower-hanging installation heights.



4) Attach the 2 DC cables, AC input plug and, if desired, dimmer cable.



5) For Daisy-Chain Linking, connect up to 4 lights in series with provided dual M25 3pin connector. Dual M16 daisy chain cables are also available for group dimming control.

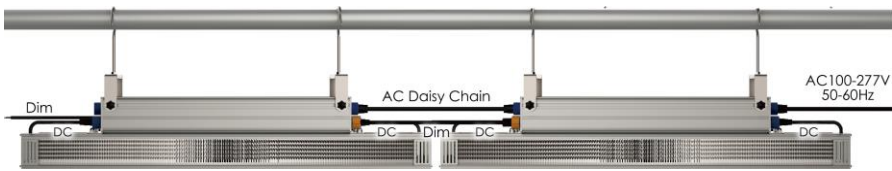

Warning – Do not attach two AC input cables to one light, or to one daisy-chained line of lights.



Never connect two AC inputs to one line of lights!

